

## Concurrency

- On multiprocessors, several threads can execute simultaneously, one on each processor.
- On uniprocessors, only one thread executes at a time. However, because of preemption and timesharing, threads appear to run concurrently.

---

Concurrency and synchronization are important even on uniprocessors.

---

## Thread Synchronization

- Concurrent threads can interact with each other in a variety of ways:
  - Threads share access, through the operating system, to system devices (more on this later . . .)
  - Threads may share access to program data, e.g., global variables.
- A common synchronization problem is to enforce *mutual exclusion*, which means making sure that only one thread at a time uses a shared object, e.g., a variable or a device.
- The part of a program in which the shared object is accessed is called a *critical section*.

**Critical Section Example (Part 1)**

```
int list_remove_front(list *lp) {
    int num;
    list_element *element;
    assert(!is_empty(lp));
    element = lp->first;
    num = lp->first->item;
    if (lp->first == lp->last) {
        lp->first = lp->last = NULL;
    } else {
        lp->first = element->next;
        free(element);
        lp->num_in_list--;
    }
    return num;
}
```

The `list_remove_front` function is a critical section. It may not work properly if two threads call it at the same time on the same list. (Why?)

---

---

CS350

---

---

Operating Systems

---

---

Spring 2012**Synchronization****Critical Section Example (Part 2)**

```
void list_append(list *lp, int new_item) {
    list_element *element = malloc(sizeof(list_element));
    element->item = new_item
    assert(!is_in_list(lp, new_item));
    if (is_empty(lp)) {
        lp->first = element; lp->last = element;
    } else {
        lp->last->next = element; lp->last = element;
    }
    lp->num_in_list++;
}
```

The `list_append` function is part of the same critical section as `list_remove_front`. It may not work properly if two threads call it at the same time, or if a thread calls it while another has called `list_remove_front`

---

---

CS350

---

---

Operating Systems

---

---

Spring 2012

## Enforcing Mutual Exclusion

- mutual exclusion algorithms ensure that only one thread at a time executes the code in a critical section
- several techniques for enforcing mutual exclusion
  - exploit special hardware-specific machine instructions, e.g., *test-and-set* or *compare-and-swap*, that are intended for this purpose
  - use mutual exclusion algorithms, e.g., *Peterson's algorithm*, that rely only on atomic loads and stores
  - control interrupts to ensure that threads are not preempted while they are executing a critical section

---

### Synchronization

---

#### Disabling Interrupts

- On a uniprocessor, only one thread at a time is actually running.
  - If the running thread is executing a critical section, mutual exclusion may be violated if
    1. the running thread is preempted (or voluntarily yields) while it is in the critical section, and
    2. the scheduler chooses a different thread to run, and this new thread enters the same critical section that the preempted thread was in
  - Since preemption is caused by timer interrupts, mutual exclusion can be enforced by disabling timer interrupts before a thread enters the critical section, and re-enabling them when the thread leaves the critical section.

---

---
- This is one way that the OS/161 kernel enforces mutual exclusion. There is a simple interface (`splhigh()`, `spl0()`, `splx()`) for disabling and enabling interrupts. See `kern/arch/mips/include/spl.h`.
- 
-

## Pros and Cons of Disabling Interrupts

- advantages:
  - does not require any hardware-specific synchronization instructions
  - works for any number of concurrent threads
- disadvantages:
  - indiscriminate: prevents all preemption, not just preemption that would threaten the critical section
  - ignoring timer interrupts has side effects, e.g., kernel unaware of passage of time. (Worse, OS/161's `sp1high()` disables *all* interrupts, not just timer interrupts.) Keep critical sections *short* to minimize these problems.
  - will not enforce mutual exclusion on multiprocessors (why??)

---

CS350

Operating Systems

Spring 2012

---

Synchronization

---

### Peterson's Mutual Exclusion Algorithm

8

```

/* shared variables */
/* note: one flag array and turn variable */
/* for each critical section */
volatile boolean flag[2]; /* shared, initially false */
volatile int turn; /* shared */

flag[i] = true; /* for one thread, i=0 and j=1 */
turn = j; /* for the other, i=1 and j=0 */
while (flag[j] && turn == j) {} /* busy wait */

critical section /* e.g., call to list_remove_front */

flag[i] = false;

```

---

Ensures mutual exclusion and avoids starvation, but works only for two threads. (Why?)

---



---

CS350

Operating Systems

Spring 2012

---

## Hardware-Specific Synchronization Instructions

- a test-and-set instruction *atomically* sets the value of a specified memory location and either
  - places that memory location's *old* value into a register, or
  - checks a condition against the memory location's old value and records the result of the check in a register
- for presentation purposes, we will abstract such an instruction as a function `TestAndSet ( address, value )`, which takes a memory location (address) and a value as parameters. It atomically stores `value` at the memory location specified by `address` and returns the previous value stored at that address

CS350	Operating Systems	Spring 2012
-------	-------------------	-------------

---

### Synchronization

---

#### A Spin Lock Using Test-And-Set

- a test-and-set instruction can be used to enforce mutual exclusion
  - for each critical section, define a lock variable
- ```
volatile boolean lock; /* shared, initially false */
```
- We will use the lock variable to keep track of whether there is a thread in the critical section, in which case the value of `lock` will be `true`
- before a thread can enter the critical section, it does the following:
- ```
while ( TestAndSet ( &lock, true ) ) { } /* busy-wait */
```
- when the thread leaves the critical section, it does
- ```
lock = false;
```
- this enforces mutual exclusion (why?), but starvation is a possibility
- 
- This construct is sometimes known as a *spin lock*, since a thread “spins” in the while loop until the critical section is free. Spin locks are widely used on multiprocessors.
-

## Semaphores

- A semaphore is a synchronization primitive that can be used to enforce mutual exclusion requirements. It can also be used to solve other kinds of synchronization problems.

- A semaphore is an object that has an integer value, and that supports two operations:

**P:** if the semaphore value is greater than 0, decrement the value. Otherwise, wait until the value is greater than 0 and then decrement it.

**V:** increment the value of the semaphore

- Two kinds of semaphores:

**counting semaphores:** can take on any non-negative value

**binary semaphores:** take on only the values 0 and 1. (V on a binary semaphore with value 1 has no effect.)

By definition, the P and V operations of a semaphore are *atomic*.

---

---

CS350

---

---

Operating Systems

---

---

Spring 2012

---

---

Synchronization

## OS/161 Semaphores

```
struct semaphore {  
    char *name;  
    volatile int count;  
};  
  
struct semaphore *sem_create(const char *name,  
    int initial_count);  
void P(struct semaphore *s);  
void V(struct semaphore *s);  
void sem_destroy(struct semaphore *s);  
  
see  
• kern/include/synch.h  
• kern/thread/synch.c
```

---

---

---

---

---

CS350

---

---

Operating Systems

---

---

Spring 2012

## Mutual Exclusion Using a Semaphore

```
struct semaphore *s;  
s = sem_create( "MySem1" , 1 ); /* initial value is 1 */  
  
P(s); /* do this before entering critical section */  
  
critical section /* e.g., call to list_remove_front */  
  
V(s); /* do this after leaving critical section */
```

---

CS350

Operating Systems

Spring 2012

---

Synchronization

## Producer/Consumer Synchronization

---

14

- suppose we have threads that add items to a list (producers) and threads that remove items from the list (consumers)
- suppose we want to ensure that consumers do not consume if the list is empty
  - instead they must wait until the list has something in it
- this requires synchronization between consumers and producers
- semaphores can provide the necessary synchronization, as shown on the next slide

---

CS350

Operating Systems

Spring 2012

## Producer/Consumer Synchronization using Semaphores

```
struct semaphore *s;
s = sem_create("Items", 0); /* initial value is 0 */
```

Producer's Pseudo-code:

```
add item to the list (call list_append())
V(s);
```

Consumer's Pseudo-code:

```
P(s);
remove item from the list (call list_remove_front())
```

The Items semaphore does not enforce mutual exclusion on the list. If we want mutual exclusion, we can also use semaphores to enforce it. (How?)

|       |                   |             |
|-------|-------------------|-------------|
| CS350 | Operating Systems | Spring 2012 |
|-------|-------------------|-------------|

### Synchronization

## Bounded Buffer Producer/Consumer Synchronization

- suppose we add one more requirement: the number of items in the list should not exceed N
- producers that try to add items when the list is full should be made to wait until the list is no longer full
- We can use an additional semaphore to enforce this new constraint:
  - semaphore Full is used to count the number of full (occupied) entries in the list (to ensure nothing is produced if the list is full)
  - semaphore Empty is used to count the number of empty (unoccupied) entries in the list (to ensure nothing is consumed if the list is empty)

```
struct semaphore *full;
struct semaphore *empty;
full = sem_create("Full", 0); /* initial value = 0 */
empty = sem_create("Empty", N); /* initial value = N */
```

## Bounded Buffer Producer/Consumer Synchronization with Semaphores

Producer's Pseudo-code:

```
P(empty);
add item to the list (call list_append( ))
V(full);
```

Consumer's Pseudo-code:

```
P(full);
remove item from the list (call list_remove_front( ))
V(empty);
```

Synchronization

### OS/161 Semaphores: P()

```
void
P(struct semaphore *sem)
{
    int spl;
    assert(sem != NULL);

    /*
     * May not block in an interrupt handler.
     * For robustness, always check, even if we can actually
     * complete the P without blocking.
     */
    assert(in_interrupt==0);

    spl = splhigh();
    while (sem->count==0) {
        threadsleep(sem);
    }
    assert(sem->count>0);
    sem->count--;
    splx(spl);
}
```

CS350

Operating Systems

Spring 2012

18

CS350

Operating Systems

Spring 2012

## Thread Blocking

- Sometimes a thread will need to wait for an event. One example is on the previous slide: a thread that attempts a P() operation on a zero-valued semaphore must wait until the semaphore's value becomes positive.
- other examples that we will see later on:
  - wait for data from a (relatively) slow device
  - wait for input from a keyboard
  - wait for busy device to become idle
- In these circumstances, we do not want the thread to run, since it cannot do anything useful.
- To handle this, the thread scheduler can *block* threads.

---

### Synchronization

## Thread Blocking in OS/161

20

- OS/161 thread library functions:
  - void thread\_sleep( const void \*addr )
    - \* blocks the calling thread on address addr
  - void thread\_wakeup( const void \*addr )
    - \* unblock all threads that are sleeping on address addr
- `thread_sleep()` is much like `thread_yield()`. The calling thread is voluntarily giving up the CPU, so the scheduler chooses a new thread to run, the state of the running thread is saved and the new thread is dispatched.  
However
  - after a `thread_yield()`, the calling thread is *ready* to run again as soon as it is chosen by the scheduler
  - after a `thread_sleep()`, the calling thread is blocked, and should not be scheduled to run again until after it has been explicitly unblocked by a call to `thread_wakeup()`.

---

### CS350

### Operating Systems

---

Spring 2012

---

### CS350


### Operating Systems

---

Spring 2012

## Thread States

- a very simple thread state transition diagram

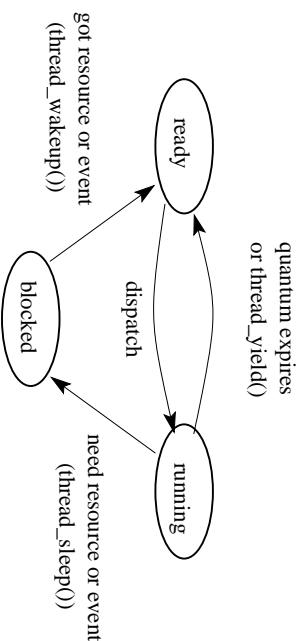

- the states:

**running:** currently executing

**ready:** ready to execute

**blocked:** waiting for something, so not ready to execute.

CS350

Operating Systems

Spring 2012

Synchronization

22

## OS/161 Semaphores: V() kern/thread/synch.c

```

void
V(struct semaphore *sem)
{
    int spl;
    assert(sem != NULL);
    spl = splhigh();
    sem->count++;
    assert(sem->count>0);
    thread_wakeup(sem);
    splx(spl);
}
  
```

CS350

Operating Systems

Spring 2012

## OS/161 Locks

- OS/161 also uses a synchronization primitive called a *lock*. Locks are intended to be used to enforce mutual exclusion.

```
struct lock *mylock = lock_create( "LockName" );
```

```
lock_acquire(mylock);
```

```
critical section /* e.g., call to list_remove_front */
```

```
lock_release(mylock);
```

- A lock is similar to a binary semaphore with an initial value of 1. However, locks also enforce an additional constraint: the thread that releases a lock must be the same thread that most recently acquired it.
- The system enforces this additional constraint to help ensure that locks are used as intended.

---

CS350

Operating Systems

Spring 2012

---

Synchronization

24

## Condition Variables

- OS/161 supports another common synchronization primitive: *condition variables*
- each condition variable is intended to work together with a lock: condition variables are only used *from within the critical section that is protected by the lock*
- three operations are possible on a condition variable:
  - wait:** This causes the calling thread to block, and it releases the lock associated with the condition variable. Once the thread is unblocked it reacquires the lock.
  - signal:** If threads are blocked on the signaled condition variable, then one of those threads is unblocked.
  - broadcast:** Like signal, but unblocks all threads that are blocked on the condition variable.

---

CS350

Operating Systems

Spring 2012

## Using Condition Variables

- Condition variables get their name because they allow threads to wait for arbitrary conditions to become true inside of a critical section
- Normally, each condition variable corresponds to a particular condition that is of interest to an application. For example, in the bounded buffer producer/consumer example on the following slides, the two conditions are:
  - $count > 0$  (condition variable not empty)
  - $count < N$  (condition variable not full)
- when a condition is not true, a thread can wait on the corresponding condition variable until it becomes true
- when a thread detects that a condition is true, it uses signal or broadcast to notify any threads that may be waiting

=====  
Note that signalling (or broadcasting to) a condition variable that has no waiters has *no effect*. Signals do not accumulate.

=====

---

CS350

Operating Systems

Spring 2012

---

Synchronization

## Waiting on Condition Variables

- when a blocked thread is unblocked (by signal or broadcast), it reacquires the lock before returning from the wait call
- a thread is in the critical section when it calls wait, and it will be in the critical section when wait returns. However, in between the call and the return, while the caller is blocked, the caller is out of the critical section, and other threads may enter.
- In particular, the thread that calls signal (or broadcast) to wake up the waiting thread will itself be in the critical section when it signals. The waiting thread will have to wait (at least) until the signaller releases the lock before it can unblock and return from the wait call.

=====  
This describes Mesa-style condition variables, which are used in OS/161. There are alternative condition variable semantics (Hoare semantics), which differ from the semantics described here.

=====

---

CS350

Operating Systems

Spring 2012

## Bounded Buffer Producer Using Condition Variables

```

volatile int count = 0; /* must initially be 0 */
struct lock *mutex; /* for mutual exclusion */
struct cv *notfull, *notempty; /* condition variables */

/* Initialization Note: the lock and cv's must be created
 * using lock_create() and cv_create() before produce()
 * and consume() are called */

```

```

Produce(itemType item) {
    lock.acquire(mutex);
    while (count == N) {
        cv.wait(notfull, mutex);
    }
    add item to buffer (call list_append())
    count = count + 1;
    cv.signal(notempty, mutex);
    lock.release(mutex);
}

```

Synchronization

28

## Bounded Buffer Consumer Using Condition Variables

```

itemType Consume() {
    lock.acquire(mutex);
    while (count == 0) {
        cv.wait(notempty, mutex);
    }
    remove item from buffer (call list_remove_front())
    count = count - 1;
    cv.signal(notfull, mutex);
    lock.release(mutex);
    return(item);
}

```

---

Both Produce() and Consume() call cv.wait() inside of a while loop. Why?

---

## Monitors

- Condition variables are derived from *monitors*. A monitor is a programming language construct that provides synchronized access to shared data. Monitors have appeared in many languages, e.g., Ada, Mesa, Java.
- a monitor is essentially an object with special concurrency semantics
  - it is an object, meaning
    - it has data elements
  - the data elements are encapsulated by a set of methods, which are the only functions that directly access the object's data elements
- only *one* monitor method may be active at a time, i.e., the monitor methods (together) form a critical section
  - if two threads attempt to execute methods at the same time, one will be blocked until the other finishes
- inside a monitor, condition variables can be declared and used

---

CS350

Operating Systems

Spring 2012

---

Synchronization

## Monitors in OS/161

- The C language, in which OS/161 is written, does not support monitors.
- However, programming convention and OS/161 locks and condition variables can be used to provide monitor-like behavior for shared kernel data structures:
  - define a C structure to implement the object's data elements
  - define a set of C functions to manipulate that structure (these are the object "methods")
    - ensure that only those functions directly manipulate the structure
  - create an OS/161 lock to enforce mutual exclusion
  - ensure that each access method acquires the lock when it starts and releases the lock when it finishes
  - if desired, define one or more condition variables and use them within the methods.

---

CS350

Operating Systems

Spring 2012

## Deadlocks

- Suppose there are two threads and two locks, lockA and lockB, both initially unlocked.
- Suppose the following sequence of events occurs
  1. Thread 1 does lock\_acquire (lockA).
  2. Thread 2 does lock\_acquire (lockB).
  3. Thread 1 does lock\_acquire (lockB) and blocks, because lockB is held by thread 2.
  4. Thread 2 does lock\_acquire (lockA) and blocks, because lockA is held by thread 1.

These two threads are *deadlocked* - neither thread can make progress. Waiting will not resolve the deadlock. The threads are permanently stuck.

---

---

CS350

---

---

Operating Systems

---

---

Spring 2012

---

---

Synchronization

---

---

32

### Deadlocks (Another Simple Example)

- Suppose a machine has 64 MB of memory. The following sequence of events occurs.
  1. Thread A starts, requests 30 MB of memory.
  2. Thread B starts, also requests 30 MB of memory.
  3. Thread A requests an additional 8 MB of memory. The kernel blocks thread A since there is only 4 MB of available memory.
  4. Thread B requests an additional 5 MB of memory. The kernel blocks thread B since there is not enough memory available.

These two threads are deadlocked.

---

---

---

---

CS350

---

---


Operating Systems

---

---

Spring 2012

## Resource Allocation Graph (Example)

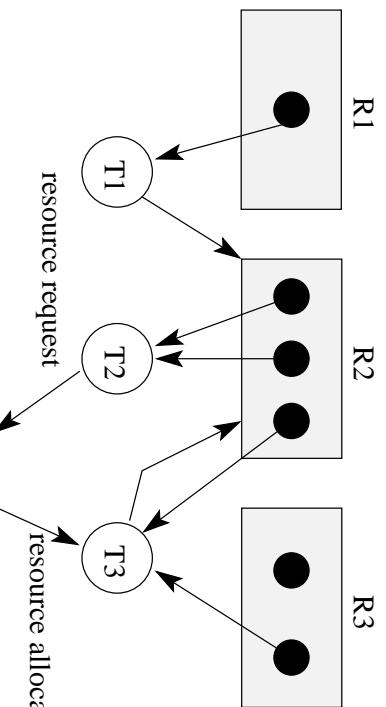

Is there a deadlock in this system?

CS350


Operating Systems

Spring 2012

Synchronization

## Resource Allocation Graph (Another Example)

34

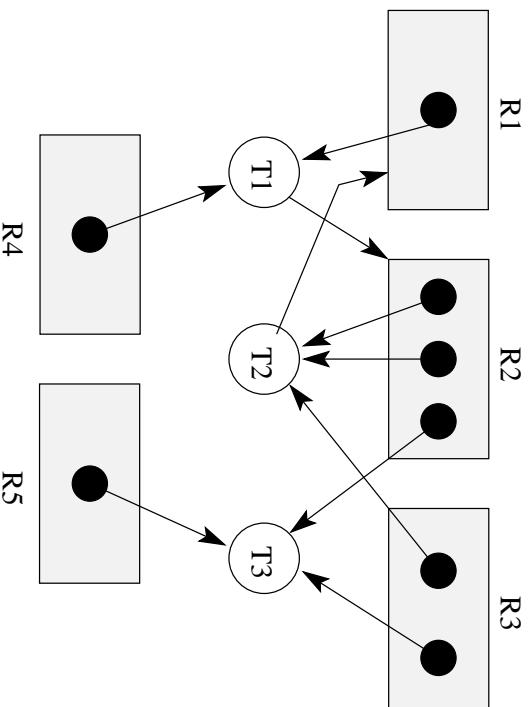

Is there a deadlock in this system?

CS350

Operating Systems

Spring 2012

## Deadlock Prevention

**No Hold and Wait:** prevent a thread from requesting resources if it currently has resources allocated to it. A thread may hold several resources, but to do so it must make a single request for all of them.

**Preemption:** take resources away from a thread and give them to another (usually not possible). Thread is restarted when it can acquire all the resources it needs.

**Resource Ordering:** Order (e.g., number) the resource types, and require that each thread acquire resources in increasing resource type order. That is, a thread may make no requests for resources of type less than or equal to  $i$  if it is holding resources of type  $i$ .

---

### Synchronization

---

36

## Deadlock Detection and Recovery

- main idea: the system maintains the resource allocation graph and tests it to determine whether there is a deadlock. If there is, the system must recover from the deadlock situation.
- deadlock recovery is usually accomplished by terminating one or more of the threads involved in the deadlock
- when to test for deadlocks? Can test on every blocked resource request, or can simply test periodically. Deadlocks persist, so periodic detection will not “miss” them.

---

Deadlock detection and deadlock recovery are both costly. This approach makes sense only if deadlocks are expected to be infrequent.

---

## Detecting Deadlock in a Resource Allocation Graph

- System State Notation:

- $D_i$ : demand vector for thread  $T_i$
- $A_i$ : current allocation vector for thread  $T_i$
- $U$ : unallocated (available) resource vector

- Additional Algorithm Notation:

- $R$ : scratch resource vector
- $f_i$ : algorithm is finished with thread  $T_i$ ? (boolean)

| CS350 | Operating Systems | Spring 2012 |
|-------|-------------------|-------------|
|-------|-------------------|-------------|

---

Synchronization

### Detecting Deadlock (cont'd)

---

38


```

/* initialization */
R = U
for all i, fi = false
/* can each thread finish? */
while ∃ i ( ¬ fi ∧ (Di ≤ R) ) {
    R = R + Ai
    fi = true
}
/* if not, there is a deadlock */
if ∃ i ( ¬ fi ) then report deadlock
else report no deadlock

```

## Deadlock Detection, Positive Example

- $D_1 = (0, 1, 0, 0, 0)$
- $D_2 = (0, 0, 0, 0, 1)$
- $D_3 = (0, 1, 0, 0, 0)$
- $A_1 = (1, 0, 0, 0, 0)$
- $A_2 = (0, 2, 0, 0, 0)$
- $A_3 = (0, 1, 1, 0, 1)$
- $U = (0, 0, 1, 1, 0)$

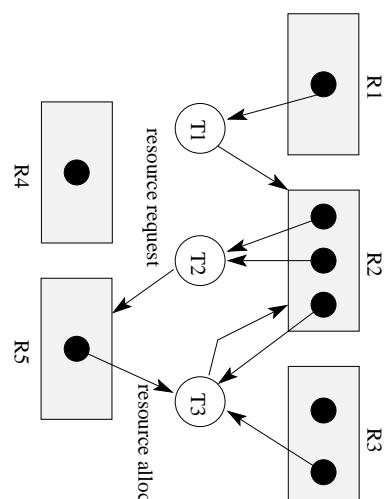

The deadlock detection algorithm will terminate with  $f_1 == f_2 == f_3 == \text{false}$ , so this system is deadlocked.

## Synchronization

### Deadlock Detection, Negative Example

40

- $D_1 = (0, 1, 0, 0, 0)$
- $D_2 = (1, 0, 0, 0, 0)$
- $D_3 = (0, 0, 0, 0, 0)$
- $A_1 = (1, 0, 0, 1, 0)$
- $A_2 = (0, 2, 1, 0, 0)$
- $A_3 = (0, 1, 1, 0, 1)$
- $U = (0, 0, 0, 0, 0)$

This system is not in deadlock. It is possible that the threads will run to completion in the order  $T_3, T_1, T_2$ .